


Category 5e U/UTP External

J-2Y(St)Y 4x2x0.51 (AWG 24)

100□ Data Cable IEC 61156-5 CAT-5e

100□ Data Cable EN50288-3-1: 100MHz

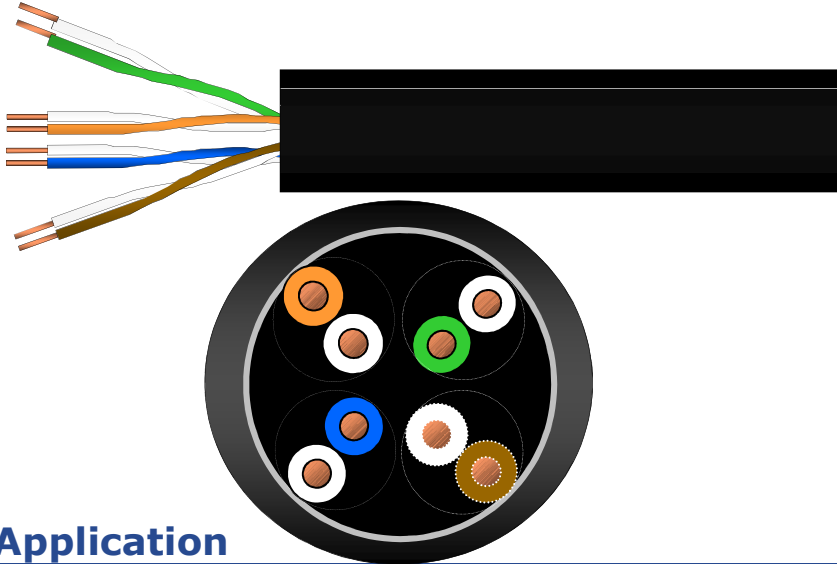

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
 IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T
 IEEE 802.5 16 MB; ISDN; FDDI; ATM

Standards

ISO/IEC 11801 2nd ed; IEC 61156-5
 EN 50173; EN 50288-2-1

Fire rating

None

Construction

Conductor	bare copper wire Ø 0.51 mm (AWG24)
Insulation	Solid Polyethylene, Ø 1.03 mm nom
Twisting	2 cores to the pair
Cable lay up	1x4 pairs to the core
Pair screen	
Overall screen	
Sheath	PE: OD 4.85MM Nom

Category 5e U/UTP External

Mechanical Properties

Bending radius	without load	8 x (OD)
	with load	12 x (OD)
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

Electrical Properties

at 20°C± 5°C

DC loop resistance		≤ 169 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩxkm
Capacitance	at 800 Hz	Nom. 50 nF/km
Capacitance unbalance	(pair to ground)	≤ 1500 pF/km
Return Loss	(100 MHz)	23.0dB
Nominal velocity of propagation		approx. 66%
Propagation delay		≤ 427 ns/100 m
Delay skew		≤ 45 ns/100 m
Test voltage	(DC, 1 min) Core/Core and Core/Screen	1000 V

F (MHZ)	Attenuation (dB/100m) Nominal	NEXT (dB)	PS-NEXT (dB)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1.0	2.0	65	62	68	65	20
4.0	3.7	56	53	56	53	23
10.0	6.0	50	47	48	45	25
16.0	7.6	47	44	44	41	25
20.0	8.5	45	42	42	39	25
31.2	10.7	40	40	38	35	24
62.5	15.7	38	35	32	29	22
100.0	19.9	35	32	28	25	20

Category 5e U/UTP External

Annex A

Measured Limits, Factory Inspection

Conductor – Plain and Soft Copper

Insulation

Colours	RAL			
Blue	5015*			
Orange	2004*			
Green	6018*			
Brown	8003*			
White	9010*			

* guidance only
 Jacket

Dimensions	Tolerance	Radial Thickness	Elongation at Break	Tensile strength
4.85mm	± 0.20mm Min (point) 0.36mm	± 0.1mm	125%	Min 9 Mpa Nom 16.9 ± 0.4Mpa
Colour	RAL 9005			
black				

[PRODUCT CODE TABLE]

© PRYSMIAN GROUP 2013, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.