


1. ELECTRICAL TEST:
 - 1.1 100% OPEN & SHORT & MIS WIRE TEST
 - 1.2 CONTACT RESISTANCE:3 OHM(MAX)
 - 1.3 INSULATION RESISTANCE:10 M OHM(MIN)
 - 1.4 HI-POT TEST:DC 300V/10ms
2. RoHS Compliant

CABLE SPEC.

P/N.	L	T	Max resolution
2409-1W	1M	20mm	4K 60Hz
2409-2W	2M	30mm	4K 60Hz
2409-3W	3M	30mm	4K 60Hz

Pin Assignment

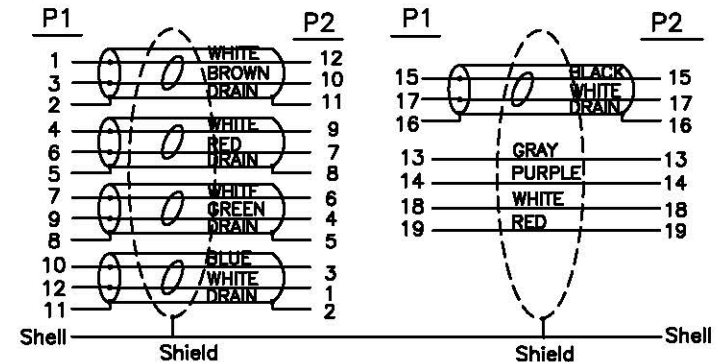

9	TRANSPARENT PE ROHS LDPE	4	g
8	45P WHITE PVC RoHS	10	g
7	Black Heat shrinkable casing ϕ 1.5mm	0.034	M
6	DisplayPort M transparent dust cover	2	pcs
5	DisplayPort M white ABS Below shell	2	pcs
4	DisplayPort M white ABS UP shell No DP LOGO	2	pcs
3	DisplayPort Port M 30AWG BLACK cable clamp	2	pcs
2	DisplayPort Port M shell Nickel plating black Insulation, Terminal Gold plating 3u	2	pcs
1	DP~UL20276~<7/0.10TA*1PR+EAM)*5C+7/0.10TA*5C+AE.B(AL)85%~DD:6.0MM White Marking: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80C 30V VW-1	L	M
No	DESCRIPTION	Q'TY	UNIT

REV.	DESCRIPTION	DATE	CHANGER
	TOLERANCE INCHES M/M		
	.X .015 .30		
	.XX .010 .10		
	.XXX .005 .05		
DRAWN BY	JX.YAO	CUSTOMER :	IFO
CHECK BY		CUSTOMER P/N:	
APPD BY		SCALE	NONE
		UNIT	MM
		DATE	2019.02.19
		DRAWING NO:	
		REV	A
			1/1



TITLE: Display Port M to M WHITE